

15W Par38 LED



Model Number

ECO-PAR38B-15W

Performance Summary

- ⊙ 90W equivalent Halogen Bulb
- ⊙ CCT: 2700K, 3000K, 4000K, 5000K
- ⊙ 1400lm @15W
- ⊙ UL/cUL, Energy Star certified
- ⊙ Dimmable
- ⊙ 3 year Warranty

SPECIFICATION

Web: www.eco-story.com
E-mail: sales@eco-story.com
Tel: 207-699-5727, Fax: 207-699-2321
Address: 151 Newbury Street, Portland Maine 04101



LM79
LM80



Ordering Information

Model No.	Description	Lumens	Beam Angle	CCT	Dimmable	Weight(g)	Dimension (Dia X H mm)	Input Voltage	Certificates
ECO-PAR38B-15W	15W PAR38	1200lm	36 degree	2700K 3000K 5000K	Yes	331	122x120	110~120V ac	Energy Star,UL

Features

- ⦿ Power Output: 15W
- ⦿ 100W equivalent Halogen Bulb
- ⦿ Max Operating Temperature: 105 F
- ⦿ LED Type: COB
- ⦿ LED Brand: Seoul
- ⦿ Light Output: 1200lm
- ⦿ Color Temp: 2700K, 3000K, 4000K, 5000K
- ⦿ Color Rendering Index: ≥90
- ⦿ Dimming Range: 5-100%
- ⦿ Rated Voltage: 110-120Vac
- ⦿ Efficacy: 80 lumen/watt
- ⦿ Life Span: 25,000 hours
- ⦿ Warranty: 3 years
- ⦿ Noise Level @ 10': <24dB
- ⦿ Noise Level @ 50': <24dB
- ⦿ Base: E26
- ⦿ Certificate: UL/cUL(E346471),FCC,Energy Star


Applications

Track Lights , Recessed Downlights , Display Lights

Attention


- ⦿ Assure the lamps are being used under specified voltage.
- ⦿ Ambience temperature needs to be between -20°C~45°C
- ⦿ Indoor application only, not for moist or corrosive environment
- ⦿ The lamps must NOT be subjected to mechanical stress.
- ⦿ Assure the lamps to be mounted into fixture firmly
- ⦿ Only installed by professional personnel

Lux Chart




Model#	Height	Average Lux (lx)	Light range (dia.)
ECO-PAR38B-15W	1M	2209	70
ECO-PAR38B-15W	2M	552	139
ECO-PAR38B-15W	3M	245	209
ECO-PAR38B-15W	4M	138	278

Distribution curve

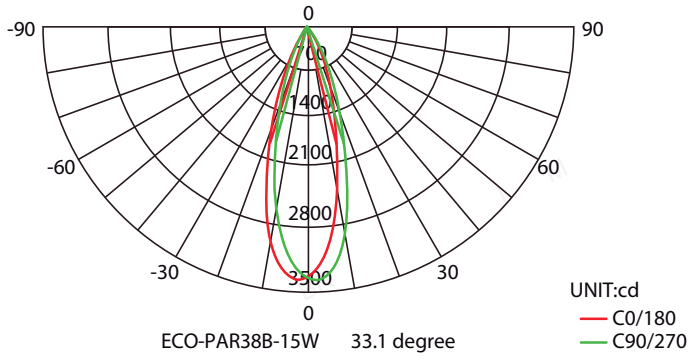


Packaging

Model No.	Inner Box Dim(LxWxH mm)	Shipping Carton Dim(LxWxH mm)	pieces/ Carton
ECO-PAR38B-15W	128x128x135mm	525x400x285mm	24pcs

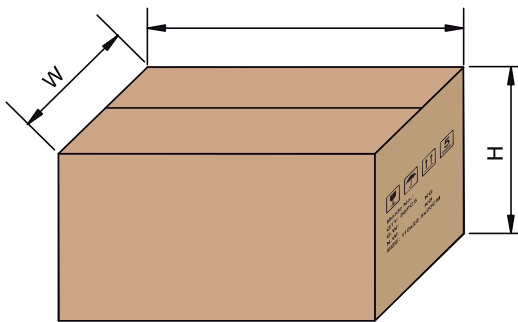


Carton




Inner Box

Model No.	Inner Box Dim(LxWxH mm)	Shipping Carton Dim(LxWxH mm)	pieces/ Carton
ECO-PAR38B-15W	206x128x135mm	635x400x285mm	36pcs

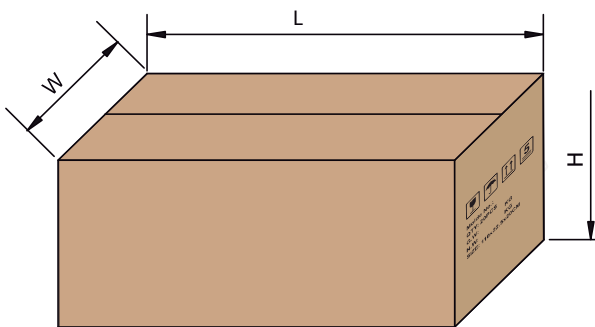

Carton



Inner Box